

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/003624

International filing date: 04 February 2005 (04.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/542,348  
Filing date: 06 February 2004 (06.02.2004)

Date of receipt at the International Bureau: 14 March 2005 (14.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1291910

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*March 03, 2005*

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.**

**APPLICATION NUMBER: 60/542,348**

**FILING DATE: February 06, 2004**

**RELATED PCT APPLICATION NUMBER: PCT/US05/03624**



Certified by

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office

020604

17236 U.S. PTO

Please type a plus sign (+) inside this box → ☐Approved for use through 01/31/2001. PTO/SB/16 (2-98)  
OMB 0651-0037  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

22782 U.S. PTO  
60/542348

020604

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
Christina		Blaschke		White Pigeon, Michigan	
Daniel V.		Brown		Elkhart, Indiana	
Sung-Kwon		Jung		Granger, Indiana	
<input type="checkbox"/> Additional inventors are being named on the ___ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
FLUID TESTING SENSOR HAVING VENTS FOR DIRECTING FLUID FLOW					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number		<input type="text"/>		Place Customer Number Bar Code Label here	
OR Type Customer Number here					
<input checked="" type="checkbox"/> Firm or Individual Name		Elizabeth A. Levy, Esq.			
Address		Bayer Healthcare LLC			
Address		P. O. Box 40			
City		Elkhart	State	Indiana	ZIP 46515-0040
Country		USA	Telephone	574/264-8394	Fax 574/262-7564
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		<input type="text"/>		<input type="checkbox"/> Small Entity Statement	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		<input type="text"/>		<input type="checkbox"/> Other (specify) <input type="text"/>	
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees		FILING FEE AMOUNT (\$)		13-3375	
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number		13-3375		\$160.00	
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE Elizabeth A. Levy  
TYPED or PRINTED NAME Elizabeth A. Levy  
TELEPHONE 574/264-8394

Date 01/28/04

REGISTRATION NO. 34,375  
(if appropriate)  
Docket Number: MSE #2694**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C., 20231.

Elkhart Area Site

January 28, 2004

Bayer Corporation  
1884 Miles Avenue  
P.O. Box 40  
Elkhart, IN 46515-0040

Mail Stop - PROVISIONAL APPLICATION  
Hon. Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450

**PROVISIONAL APPLICATION COVER SHEET**

RE: Provisional Application under 37 CFR 1.53

Invention of: Christina Blaschke, Daniel V. Brown and  
Sung-Kwon Jung

Residences: 69590 Bellows Road, White Pigeon, MI;  
1720 Lawndale Road, Elkhart, IN; and  
11738 Antler Street, Granger, IN,  
respectively

Entitled: FLUID TESTING SENSOR HAVING VENTS FOR  
DIRECTING FLUID FLOW

Docket No.: MSE #2694

Sir:

Transmitted herewith for filing is a provisional application.  
This application includes the following:

- ☒ 14 Pages of specification, including claims and abstract
- ☒ 6 Sheets of drawing - (in triplicate)
- ☒ An Assignment of the invention to Bayer Healthcare LLC  
(and cover letter)
- ☒ A check of \$160 to cover the filing fee
- ☒ The Commissioner is hereby authorized to treat any  
concurrent or future reply, requiring a petition for an  
extension of time under 37 CFR 1.136 for its timely  
submission, as incorporating, a petition for extension of  
time for the appropriate length of time and to charge all  
additional fees, including fees under 37 CFR 1.17, which  
may be required, or credit any overpayment to Account No.  
13-3375. A duplicate copy of this sheet is enclosed.

January 28, 2004


ATTENTION MAIL ROOM:

If for any reason this application is found to be incomplete, please advise by collect telephone call to Area Code (574) 264-8394.

Kindly acknowledge receipt of this application by returning the stamped, self-addressed post card enclosed herewith.

Respectfully submitted,

BAYER HEALTHCARE LLC

  
Elizabeth A. Levy  
Attorney for Applicants  
Reg. No. 34,375  
1884 Miles Avenue  
Elkhart, IN 46514-0040  
Telephone: 574/264-8394  
Facsimile: 574/262-7564

JR11604

Enclosures

---

---

APPLICATION FOR UNITED STATES LETTERS PATENT

FOR

**FLUID TESTING SENSOR HAVING VENTS FOR DIRECTING  
FLUID FLOW**

BY

Christina Blaschke

Daniel V. Brown


Sung-Kwon Jung

---

EXPRESS MAIL MAILING LABEL

NUMBER: FB16593136XUS  
DATE: February 5, 2004

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

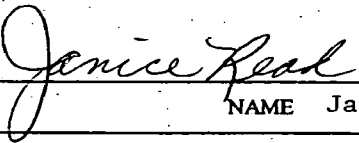  
NAME Janice Read

**FLUID TESTING SENSOR HAVING VENTS**  
**FOR DIRECTING FLUID FLOW**

**FIELD OF THE INVENTION**

5           The present invention relates generally to sensors for fluid analysis and more particularly is directed to sensors having vents placed for controlling fluid location within a capillary cavity.

**BACKGROUND OF THE INVENTION**

10           Sensors are useful for measuring analytes in many applications, including clinical, environmental, and process monitoring. In many of these applications, it is desirable to perform the measurement using a small liquid sample volume. Correct positioning of the sample aliquot over the transducer element or reactive area of the sensor is crucial to obtaining an accurate result.

15           For example, sensors for electrochemical fluid analysis applications (such as blood glucose testing) rely on proper fluid placement over electrodes, or "active" portions of the sensors. Fluid location is also important in an optically based sensor. If the fluid sample is not located within the light path, the system may yield an inaccurate result. Fluid placement within a sensor (for example, within a capillary  
20           cavity) thus becomes an important factor in achieving accurate measurements.

          Many factors affect fluid placement within a sensor. For example, capillary geometry, internal capillary surface wettability, sample size, and composition all affect fluid placement. The impact of vent shape and location has been overlooked, as it pertains to fluid placement within a capillary-fill sensor. There is a need for fluid  
25           analysis sensors wherein the location and shape of vents are designed to effect proper fluid placement and thereby minimize required sample volume and increase accuracy of readings.

**SUMMARY OF THE INVENTION**

30           Sensors for fluid analysis are provided with one or more vents with various geometric shapes for directing fluid flow. Capillary action forces fluid into or through

a fluid analysis sensor, and vent edges direct and control the flow of fluid through the sensor.

According to some embodiments of the invention, vent edges direct sample fluid to cover preferred portions of electrodes within a sensor.

5 Vent edges according to another embodiment of the invention are used to direct fluid along a tortuous path in a sensor.

According to another embodiment of the present invention, vents are used to control the timing of fluid flow through a sensor. Vents may further be used to control the timing of fluid contact with reagents.

10 The above summary of the present invention is not intended to represent each embodiment, or every aspect, of the present invention. Additional features and benefits of the present invention will become apparent from the detailed description, figures, and claims set forth below.

#### 15 **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is an exploded view of a fluid analysis sensor according to one embodiment of the present invention.

FIG. 2 is a front view of a fluid analysis sensor.

20 FIG. 3 is a front view of the fluid analysis sensor of FIG. 2 containing sample fluid within a sensor test cavity.

FIGS. 4a-4c are time elapse drawings showing the flow of sample fluid in a sensor.

FIGS. 5a-5d are time elapse drawings showing the flow of sample fluid in another sensor.

25 FIGS. 6a-6f are time elapse drawings showing the flow of sample fluid in yet another sensor.

30 While the invention is susceptible to various modifications and alternative forms, specific embodiments are shown by way of example in the drawings and are described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

**DESCRIPTION OF ILLUSTRATED EMBODIMENTS**

Sensors according to the present invention utilize vents to direct sample fluid toward desired testing locations, such as reagent areas and electrodes. Turning now to FIG. 1, a sensor 10 is shown in an exploded view. The sensor 10 comprises a base layer 12 for supporting sensor elements, an electrode layer 14, and a cover layer 16. The electrode layer 14 comprises first and second electrodes 18 and 20, both of which must make contact with a fluid sample to perform a test, such as blood glucose analysis, on the fluid sample. The electrodes 18 and 20 are contiguous with electrode assemblies 19 and 21 that make electrical contact with leads 23, allowing use of the sensor 10 in an electrochemical analysis device. The first and second electrodes 18 and 20 may also be termed, respectively, "working" and "counter" electrodes.

The second electrode assembly 21 is shown with a sub-electrode 20a that assists in detection of "underfill" situations when less than a required amount of sample fluid is inserted into the sensor 10. When the sensor 10 is underfilled with sample fluid, only a small amount of current will flow between the sub-electrode 20a and the first electrode 18, allowing for an alert to the user that the sensor 10 is underfilled.

The cover layer 16 overlays the electrode layer 14 and includes a fluid inlet area 22 into which fluid flows. The cover layer 16 further comprises a projection area 24 forming a sample cavity (shown in FIGS. 2 and 3, below) when the sensor 10 is assembled. First and second vents 26 are provided within the cover layer 16 for drawing fluid into the sample cavity via capillary action and further for guiding the placement of fluid within the sample cavity, as shown in greater detail in FIGS. 2 and 3. A dielectric layer 28 between the electrode layer 14 and the cover layer 16 surrounds a sample contact area 30 and assures that sample fluid does not make electrical contact with electrode leads 32 because contact with these leads 32 would result in inaccurate readings.

A reagent 34 is placed between the dielectric layer 28 and the cover layer 16 and contains chemicals that interact with sample fluid to produce desired electrochemical properties for analysis of the sample.

Turning now to FIG. 2, a front view of the sensor 10 of FIG. 1 focuses on a sample cavity 36 formed by the projection area 24 of the cover layer 16. The sample cavity 36 is designed to hold fluid for testing such that fluid contacts both the first electrode 18 and the second electrode 20 of the electrode layer 14. In practice, sample fluid enters the sample cavity 36 through the fluid inlet area 22 and is drawn into the sample cavity 36 via capillary action enabled by the vents 26. Sample fluid is held in contact with the first and second electrodes 18 and 20 and electrochemical testing, such as blood glucose testing, may be performed on the fluid sample.

The outer edges 38 and 40 of the electrodes 18 and 20 are covered by a dielectric layer as in FIG. 1, item number 28, and thus these edges are electrochemically inert. (For ease of illustration, the dielectric layer is not shown in FIG. 2.) It is desirable to direct sample fluid toward the center, active portions of the electrodes 18 and 20.

FIG. 3 shows a sensor 10 in the isometric view of FIG. 2 with sample fluid 42 within the sample cavity 36. Sample guide edges 44 of the vents 26 guide the sample fluid 42 away from the outer edges 38 and 40 of the counter electrode 20 and toward the middle of the electrode where optimum electrical contact between the sample fluid 42 and the electrodes 18 and 20 can be made. As shown in FIG. 3, a leading edge 46 of the sample fluid 42 has been guided between the vents 26 to make sufficient contact with the second electrode 20 to result in an accurate reading from the sensor 10.

Sensors employing vents according to the present invention may be used in a variety of embodiments to improve fluid testing applications. FIGS. 4a-c are time-elapse images of a sensor 48 employing vents 50 to create a bottleneck or "pinch point" for sample fluid 42 as it flows through the sensor 48. As shown in FIG. 4a, the sample fluid 42 is first drawn into the sensor 48 via capillary action and restrained between spacer edges 52 beneath a cover layer 16. The leading edge 46 of the sample fluid 42 has followed sample guide edges 44 of the vents 50 into a bottleneck region 54. Though the vents 50 are square-shaped, they are angled such that the spacer edges 52 intersect opposing vertices of the vents 50, and the profiles of the vents 50 as

presented to the sample fluid 42 are opposing right isosceles triangles. The sample fluid 42 is shown in FIG. 4a at a point just short of contacting the second electrode 20.

Turning now to FIG. 4b, the sensor 48 of FIG. 4a is shown at a later time. The leading edge 46 of the sample fluid 42 has progressed beyond the bottleneck region 54 of the sensor 48 and now a portion of the sample fluid 42 contacts a central area of the second electrode 20. The leading edge 46 continues past the bottleneck region 54 as time progresses, as shown in FIG. 4c, resulting in even more complete coverage of the second electrode 20 by the sample fluid 42. Vents having sample guide edges that result in a bottleneck region are useful for precise guiding of sample fluid within a sensor and for more precise timing control as fluid passes through the sensor, due to the slowing of the fluid by the bottleneck region. According to one embodiment, the progression shown in FIGS. 4a-c takes place over approximately three seconds, whereas without the bottleneck the progression would take less than 0.3 seconds.

Vents according to the present invention may be placed to cause sample fluid to flow along specific pathways and to delay fluid flow through a sensor. Such applications are useful to improve mixing between sample fluid and a reagent, and to more precisely control the timing of fluid flow through a sensor. FIGS. 5a-5d are time-elapse images of a sensor 56 having two vents 58 placed in staggered positions to create a tortuous path for sample fluid 42 to follow. FIG. 5a shows sample fluid 42 entering the sensor 56 and being led along a fluid pathway 60 by sample guide edges 44 of the vents 58. In FIG. 5a, the sample fluid 42 recently entered the sensor 56 and has been guided across a first electrode 18 by the sample guide edges 44 of a first vent 58a. The leading edge 46 of the sample fluid 42 is between the first electrode 18 and the second electrode 20.

Later, as shown in FIG. 5b, the leading edge 46 of the sample fluid 42 has been guided around a second vent 58b by the sample guide edges 44 of the second vent 58b, and the sample fluid 42 is now making contact with the second electrode 20. The sample fluid 42 continues to flow through the sensor 56 as shown in FIGS. 5c and 5d, with the leading edge 46 continuing to follow the fluid pathway 60 as it progresses through the sensor 56.

Tortuous pathways such as the one shown in FIGS. 5a-5d result in additional mixing between sample fluid 42 and reagent 34 within the sensor 56 due to increased turbulence resulting from the turns of the sample fluid 42 along the fluid pathway 60. Further, significant time delays can result from the use of a tortuous fluid pathway 60. For example, a sensor 56 as shown FIGS. 5a-5d according to some embodiments allows for delays of one to five seconds between initial insertion of fluid into the sensor and complete progression of the sample fluid along the fluid pathway. The timing of fluid flow along the fluid pathway may be changed by narrowing or widening the pathway or by making the fluid pathway longer or shorter, for example by employing different sizes of vents 58 in different locations defining the fluid pathway.

Controlled timing of fluid flow through a sensor is beneficial when more than one reagent is used, with different reagents having different optimum reaction times with the sample fluid. Multiple reagents may be used in certain optical and electrochemical testing applications. Turning now to FIGS. 6a-f, a sensor 62 having first and second vents 64a and 64b to control timing of fluid flow along a fluid pathway 60 is illustrated in time-elapse images. FIG. 6a shows the sensor 62 before sample fluid has been introduced into the sensor 62. FIG. 6b shows sample fluid 42 being introduced into the sensor 62. The leading edge 46 of the sample fluid 42 is guided by sample guide edges 44 along the fluid pathway 60 around the first vent 64a. In FIG. 6c, the leading edge 46 of the sample fluid 42 has progressed past the first vent 64a and is being guided by the sample guide edges 44 of the second vent 64b.

Turning now to FIG. 6d, the sample fluid 42 has filled in the fluid pathway 60 and is now bounded by the outer pathway edges (which in FIGS. 6a-6f are spacer edges 52) and the sample guide edges 44 of the vents 64a and 64b. Next, as shown in FIG. 6e, the sample fluid 42 fills in the volume beneath the first vent 64a. Finally, as shown in FIG. 6f, the sample fluid 42 fills in the volume beneath the second vent 64b. If reagent is supplied in two reagent areas 66a and 66b (as shown in FIG. 6d), the process shown in FIGS. 6a-6f may be used to control the timing of contact of the sample fluid 42 with each of the reagents.

The timing of sample fluid flow as shown in FIGS. 6a-6f is beneficial in applications such as blood and urine testing in which many analytes having different optimum reaction times may be used. For example, if a first reagent is placed in the first reagent area 66a and a second reagent is placed in the second reagent area 66b, the sample fluid 42 will begin to react with the first reagent before it reacts with the second reagent because the area of the first vent 64a is filled more quickly with sample fluid than is the area of the second vent 64b. As in the embodiments of FIGS. 4a-4c and 5a-5d, the length and width of the fluid pathway and the sizes and shapes of the vents may be changed to result in desired timing. According to some embodiments, timing delays of two to five seconds between contacts with reagent areas may be achieved by using the embodiment of FIGS. 6a-6f. Even longer delays can be envisioned by manipulating the surface properties, such as wettability, of the reagents.

The utility of such a delay might also be implemented in a scheme whereby the product of the first reagent zone diffuses to a second reagent zone and serves as a substrate for a second reaction. Because of the timing delay, the concentrations of both reaction products can be determined.

Another use of the embodiment of FIG. 6 would enable reading multiple reagent zones simultaneously by use of corresponding multiple signal transduction elements, including light beams and electrodes. In this embodiment, the differential wet-up time provides varying reaction times when all signal transducers are read simultaneously.

While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and are described in detail herein. It should be understood, however, that it is not intended to limit the invention to the particular forms disclosed, but, to the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A sensor for analysis of a fluid sample comprising:  
a sample cavity for accepting sample fluid;  
5 at least one test region disposed along said sample cavity; and  
at least one vent for venting said sample cavity, said at least one vent having at least one sample guide edge for guiding said sample fluid to said at least one test region.
- 10 2. The sensor of claim 1 having a plurality of vents having aligned sample guide edges for guiding said sample fluid toward said test region.
3. The sensor of claim 2 wherein two vents are square-shaped and wherein said test region is located between sample guide edges provided on separate  
15 zones of said two vents.
4. The sensor of claim 1 wherein said at least one vent comprises two staggered vents spaced from each other to form a fluid pathway within said sample cavity.  
20
5. The sensor of claim 4 wherein said fluid pathway is a tortuous fluid pathway having at least one turn along which said sample fluid flows.
6. The sensor of claim 5 further comprising a reagent layer in  
25 communication with said sample cavity.
7. The sensor of claim 1 wherein said at least one vent comprises two vents being placed proximate to each other to form a bottleneck region for controlling a flow of said sample fluid.  
30
8. The sensor of claim 1 wherein said at least one test region is selected from the group consisting of an electrode and a reagent area.

9. The sensor of claim 1 wherein said at least one test region comprises two electrodes.

5 10. The sensor of claim 9 further comprising a dielectric material covering edges of said two electrodes

11. A method for collecting sample fluid and positioning sample fluid in a test sensor for analysis of said sample fluid comprising:

10 accepting said sample fluid within a sample cavity via capillary action; and directing said sample fluid through said sample cavity toward at least one test region of said sensor using at least one sample guide edge provided on at least one vent venting said sample cavity.

15 12. The method of claim 11 wherein accepting said sample fluid comprises accepting said sample fluid at a fluid inlet area.

13. The method of claim 11 wherein said at least one test region is selected from the group consisting of an electrode and a reagent area.

20 14. The method of claim 11 wherein said at least one test region comprises two electrodes.

25 15. The method of claim 11 wherein said at least one vent comprises two vents.

16. The method of claim 15 wherein said two vents are placed at staggered positions within along said sample cavity and further comprising directing said sample fluid along a fluid pathway.

30 17. The method of claim 16 wherein said test sensor is provided with a reagent disposed along said sample cavity, wherein said fluid pathway is tortuous, and further comprising mixing said test fluid with said reagent as said sample fluid is directed along said fluid pathway.

18. A sensor for analysis of a fluid sample comprising:  
a sample cavity for accepting sample fluid, said sample cavity having an fluid inlet;

5 first and second vents within said sample cavity, said first and second vents having respective first and second vent edges and being disposed along a fluid pathway of said sample cavity such that said first vent is closer to said fluid inlet than said second vent is;

a first reagent area disposed along said sample cavity beneath said first vent;

10 and

a second reagent area disposed along said sample cavity beneath said second vent.

19. The sensor of claim 18 wherein said first and second vents are spaced  
15 along said fluid pathway such that sample fluid entering said fluid inlet contacts said first and second vent edges in succession.

20. The sensor of claim 18 wherein said first reagent is adapted to react  
20 with said sample fluid for a first optimum reaction time and said second reagent is adapted to react with said sample fluid for a second optimum reaction time, said second optimum reaction time being less than said first optimum reaction time.

21. The sensor of claim 18 further comprising additional vents having vent  
edges and being disposed along said fluid pathway.

25 22. The sensor of claim 21 further comprising additional reagent areas disposed along said sample cavities respectively beneath said additional vents.

23. A method for analyzing a fluid sample comprising:

accepting said sample fluid within a sample cavity via capillary action, said sample cavity having a fluid inlet and first and second vents disposed along a fluid pathway, said sample cavity further having a first reagent disposed beneath said first vent and a second reagent disposed beneath said second vent, said first and second vents having first and second vent edges;

guiding said fluid sample along said fluid pathway via capillary action such that said fluid passes said first vent before passing said second vent; and

filling said sample cavity such that said sample fluid first fills a first volume beneath said first vent and later fills a second volume beneath said second vent.

24. The method of claim 23 wherein a time delay between the time at which said sample fluid fills said first volume beneath said first vent and the time at which said sample fluid fills said second volume beneath said second vent is greater than about three seconds.

25. A sensor for analysis of a fluid sample comprising:

a base layer;

an electrode layer supported by said base layer, said electrode having a first electrode and a second electrode, said first and second electrodes respectfully extending from first and second electrode leads and having central portions;

a cover layer disposed above said electrode layer, said cover layer having a projection defining a sample cavity;

a fluid inlet area in fluid communication with said sample cavity; and

first and second vents, said first vent having a first guide edge and said second vent having a second guide edge opposing said first guide edge, said first and second guide edges opposing each other above at least one of said central portions of said first and second electrodes.

26. The sensor of claim 25 wherein said electrodes have central portions, an intermediate area between said first and second opposing guide edges being disposed above one of said central portions of said electrodes.

27. A sensor for analysis of a fluid sample comprising:

a sample cavity having a fluid inlet area, said sample cavity adapted for being filled via capillary action and having a vent, said vent having at least one sample guide edge for guiding fluid under capillary action within said sample cavity during filling of said sample cavity.

5

**ABSTRACT**

5 A sensor for analyzing a fluid sample has a sample cavity for accepting sample fluid. At least one test region is disposed along the sample cavity, and at least one vent fulfills the dual function of venting the sample cavity and guiding the sample fluid in the sample cavity via appropriate location and geometry of at least one sample guide edge.

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

Fig. 1

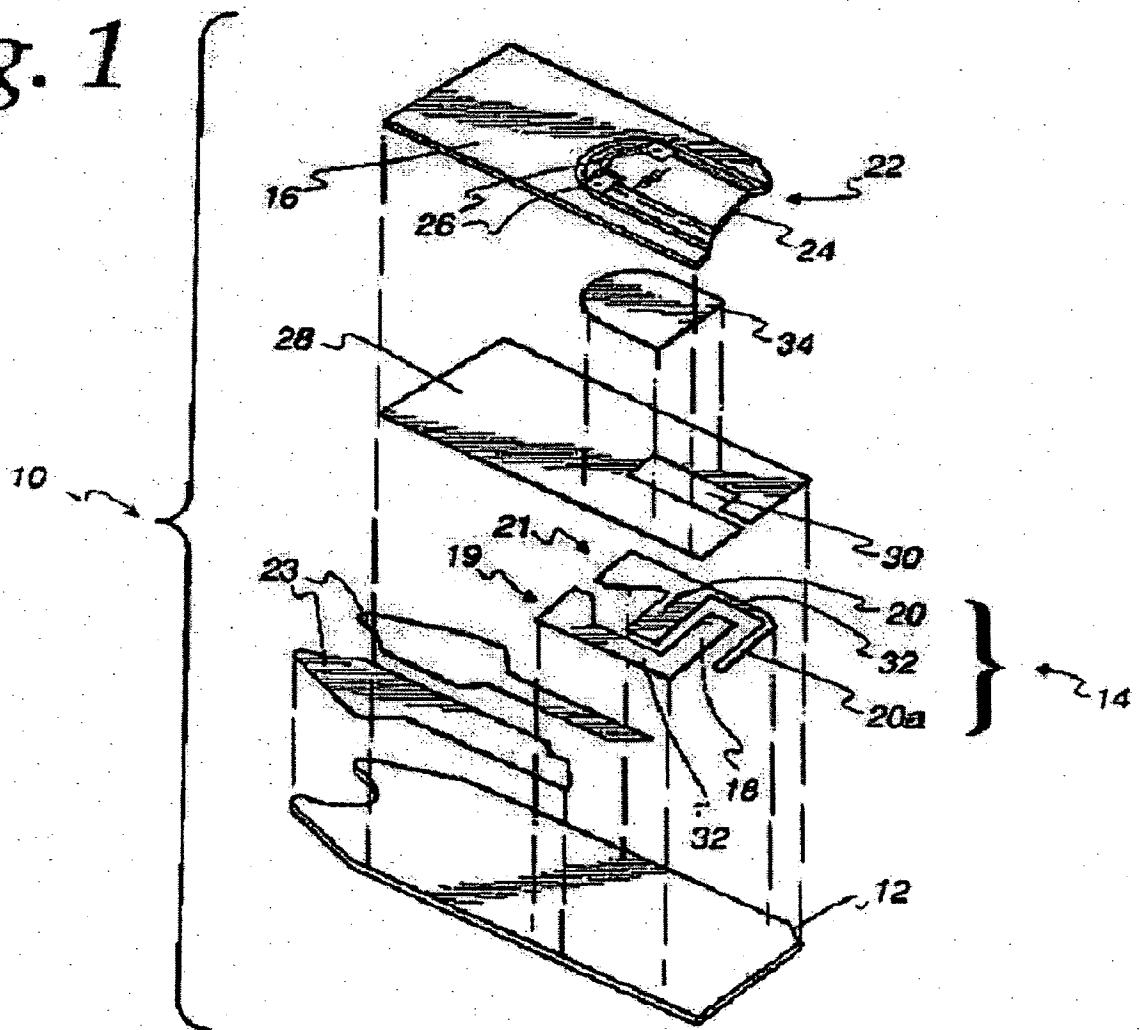


Fig. 2

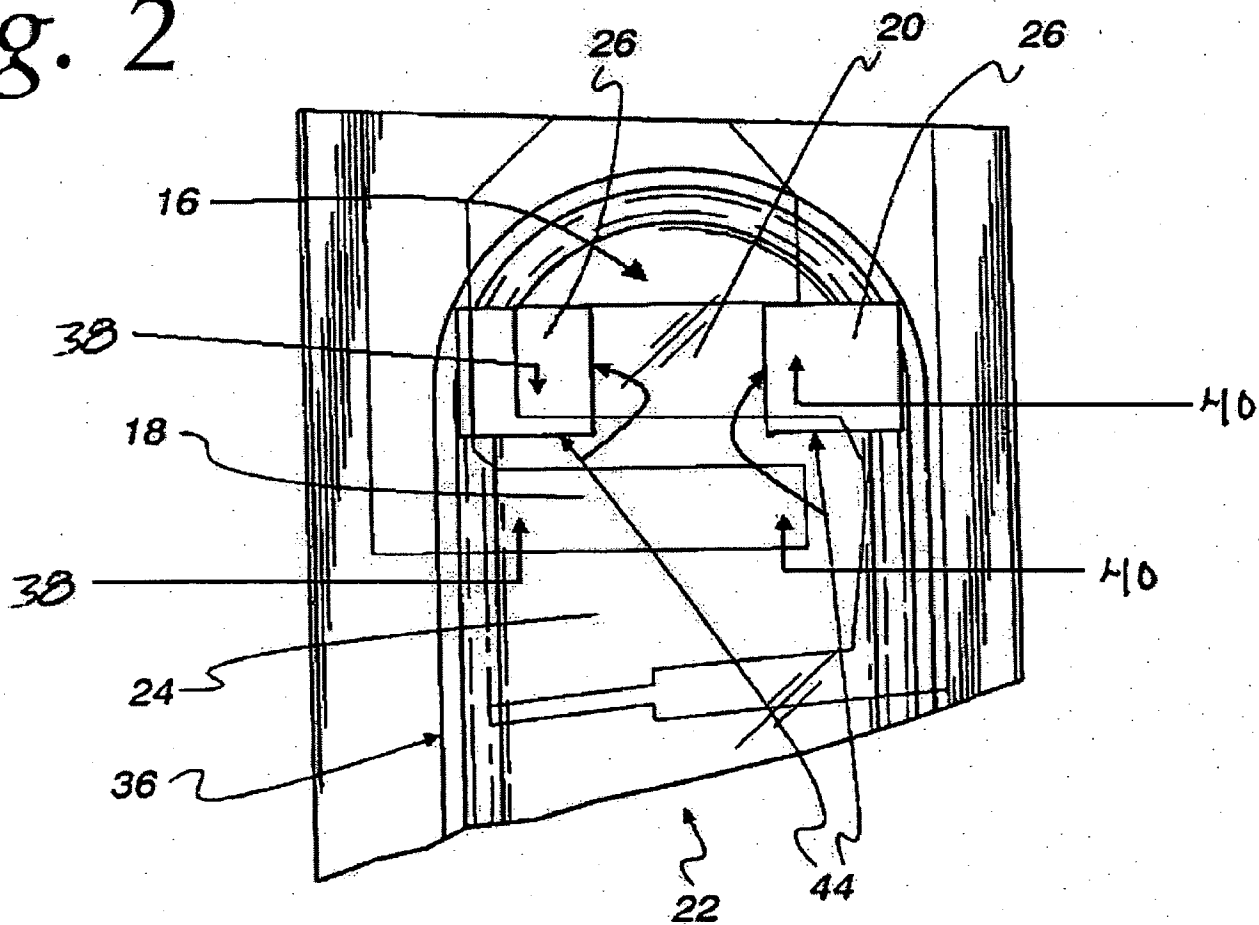


Fig. 3

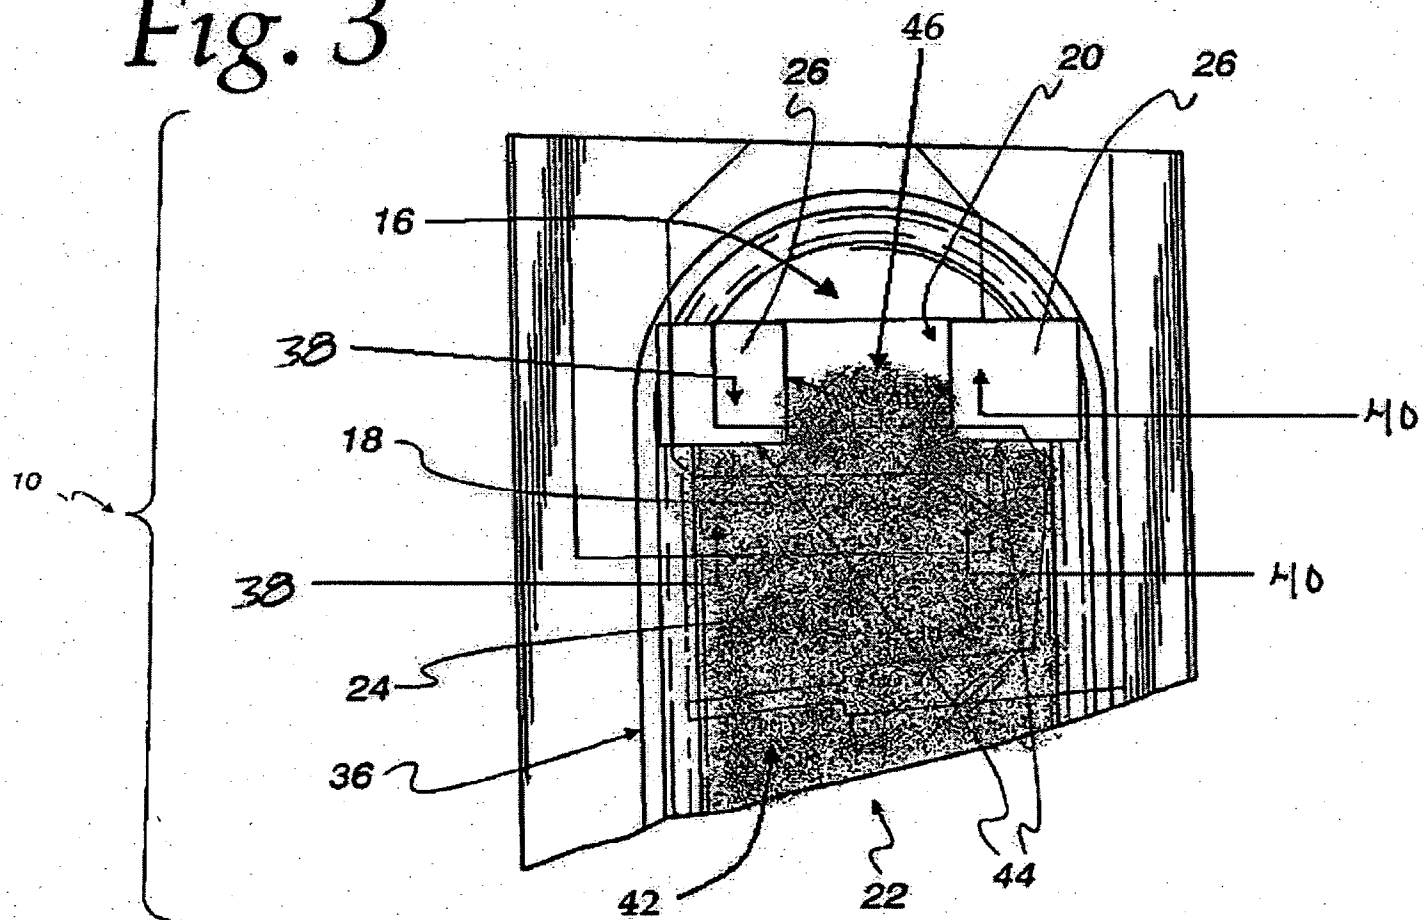


Fig. 4a

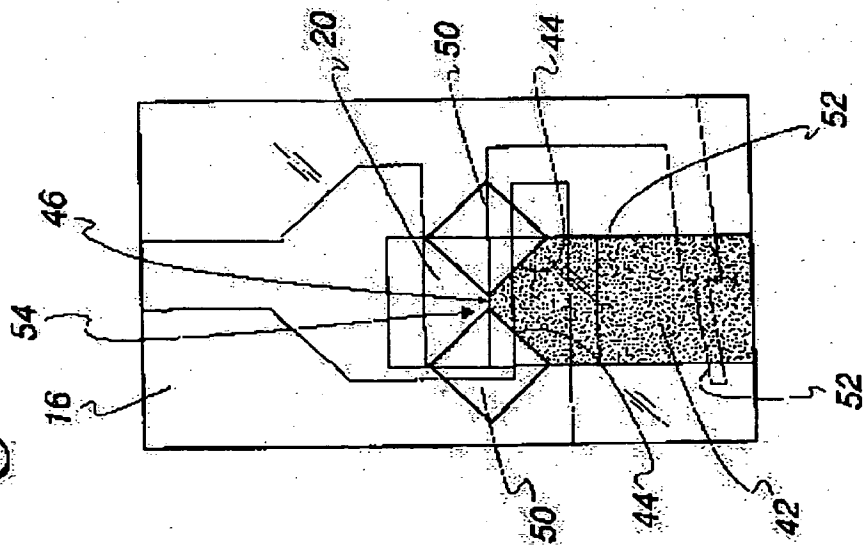


Fig. 4b

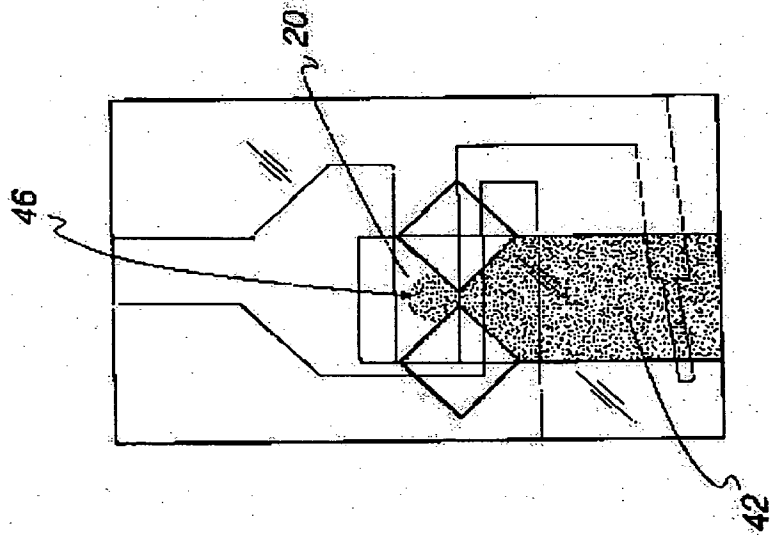


Fig. 4c

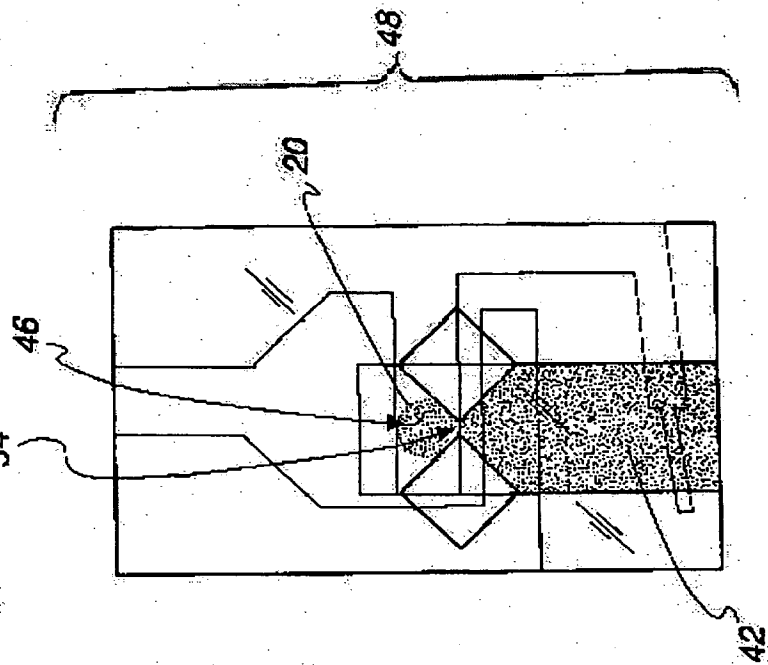


Fig. 5a

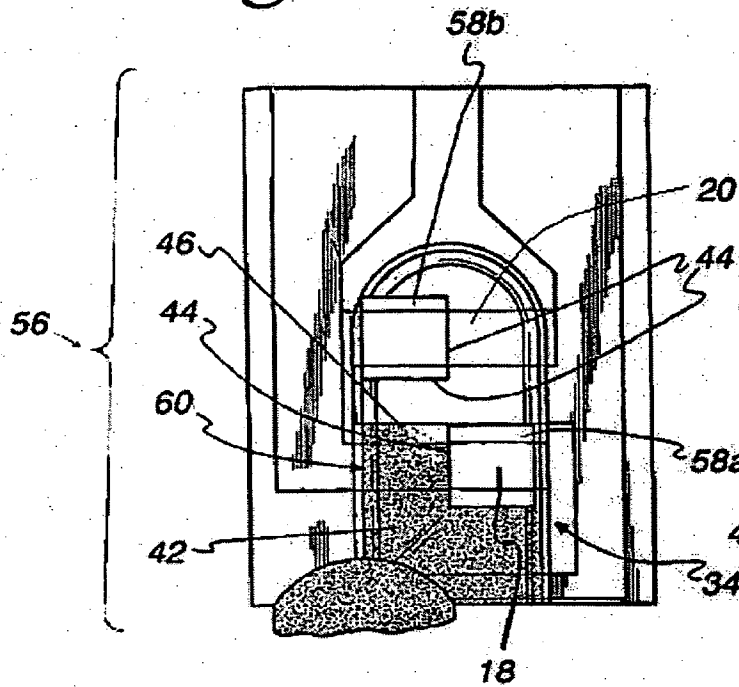


Fig 5b

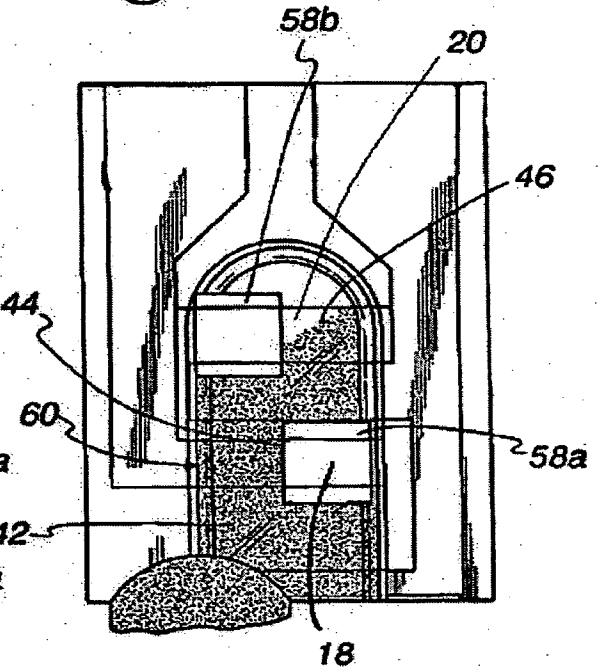


Fig. 5c

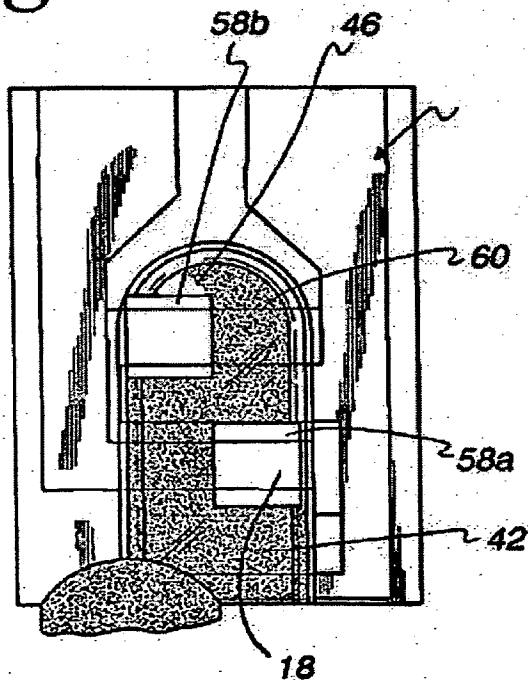


Fig. 5d

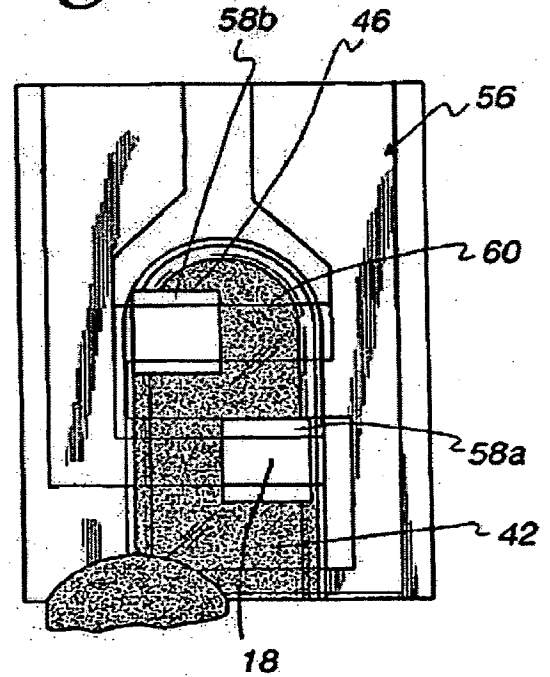


Fig 6a Fig 6b Fig. 6c


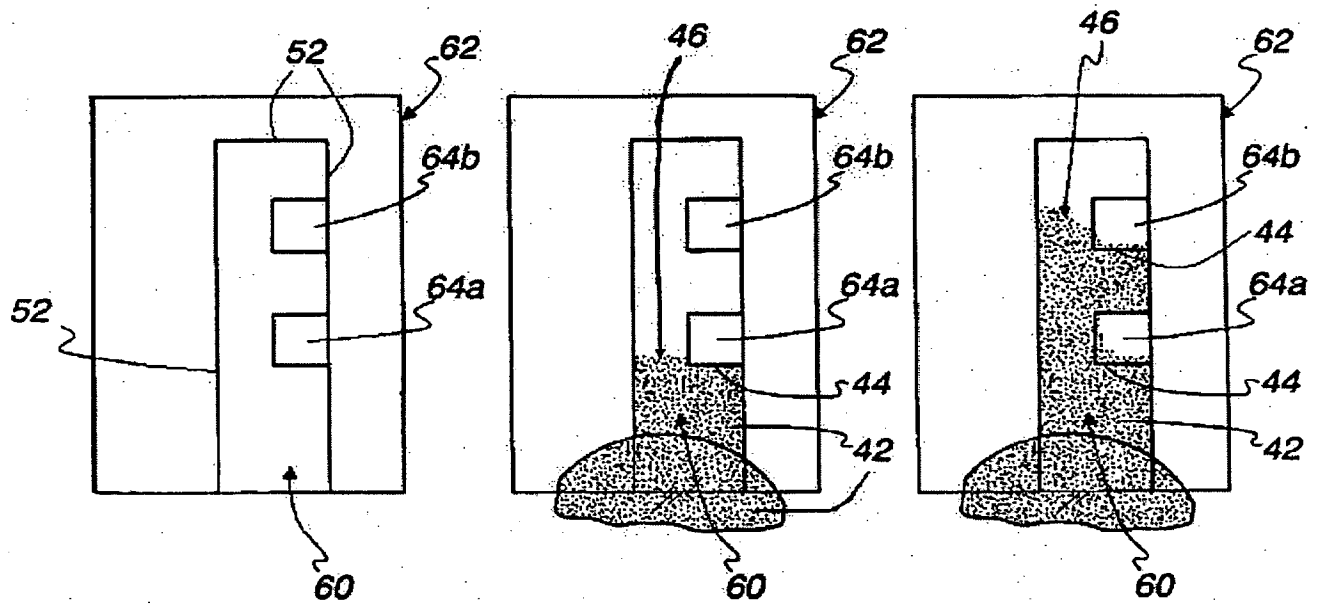


Fig. 6d Fig. 6e Fig. 6f

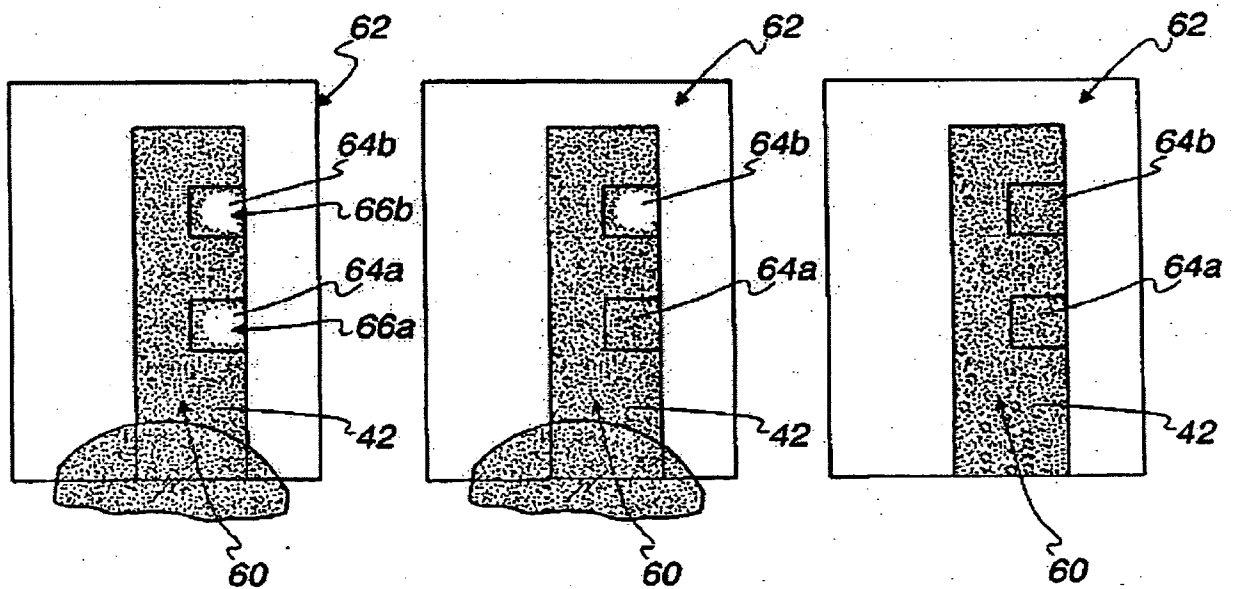

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FLUID TESTING SENSOR HAVING VENTS FOR DIRECTING FLUID FLOW

The specification of which

(check one)



is attached hereto.



was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority  
Claimed

(Number) \_\_\_\_\_

(Country) \_\_\_\_\_

(Day/Month/Year Filed) \_\_\_\_\_

☐  
Yes

☐  
No

(Number) \_\_\_\_\_

(Country) \_\_\_\_\_

(Day/Month/Year Filed) \_\_\_\_\_

☐  
Yes

☐  
No

(Number) \_\_\_\_\_

(Country) \_\_\_\_\_

(Day/Month/Year Filed) \_\_\_\_\_

☐  
Yes

☐  
No

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional applications(s) listed below.

(Application Number) \_\_\_\_\_

(Filing Date) \_\_\_\_\_

(Application Number) \_\_\_\_\_

(Filing Date) \_\_\_\_\_

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose

material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing Date) (Status: patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status: patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status: patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Andrew L. Klawitter, Reg. No. 26,557  
John M. Paolino, Reg. No. 40,340  
Mark A. Seka, Reg. No. 44,330

Julie L. Cheng, Reg. No. 33,848  
Elizabeth A. Levy, Reg. No. 34,375

Address all telephone calls to: Elizabeth A. Levy at telephone number 508/359-3876.

Address all correspondence to:

Elizabeth A. Levy, Esq., Bayer Healthcare LLC, P. O. Box 40, Elkhart, IN 46515-0040 USA

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor CHRISTINA BLASCHKE

Inventor's signature Christina Blaschke Jan 29, 2004  
(Date)

Residence 69590 Bellows Road, White Pigeon, Michigan 49099 USA

Citizenship United States of America

Post Office Address 69590 Bellows Road, White Pigeon, Michigan 49099 USA

Full name of second joint inventor, if any DANIEL V. BROWN

Inventor's signature Daniel V. Brown 29 Jan 2004  
(Date)

Residence 1720 Lawndale Road, Elkhart, Indiana 46514 USA

Citizenship United States of America

Post Office Address 1720 Lawndale Road, Elkhart, Indiana 46514 USA

Full name of third joint inventor, if any SUNG-KWON JUNG

Inventor's signature Sung-Kwon Jung Jan 29, 2004  
(Date)

Residence 11738 Antler Street, Granger, Indiana 46530 USA

Citizenship South Korea

Post Office Address 11738 Antler Street, Granger, Indiana 46530 USA